
ADS1500

User manual

Copyright © ADS TECH All Rights Reserved

<http://english.adsscan.com/>

Dear user,

Thank you for purchasing ADS1500(Oil Reset Tool). This manual contains usage and after service, please read it carefully before using.

CONTENT

I. Software Installation	01
II. Software Registration	07
III. Testing Instructions	10
IV. After Service	12

I. Software Installation

1. Software download

Put software into mobile phone from CD or download software from internet.

1) Put CD into CD-ROM of your pc or laptop, open it and copy file named

“APK” into memory card of mobile phone;

2) Download software from website:

Steps 1: Open IE Explorer and visit: <http://english.adsscan.com> (Figure-01)



Figure-01

Steps 2: Click the "Upgrade" interface and download the software on your computer.



Figure-02

2. Program installation

Steps 1: Copy file“APK”into mobile phone memory card and find a program named “My Files”.



Figure-03

Steps 2: Open the My Files >>> All Files>>> sdcard0>>>ADS1500 oil reset tool , and find out “ADS1500 oil reset tool.apk”;

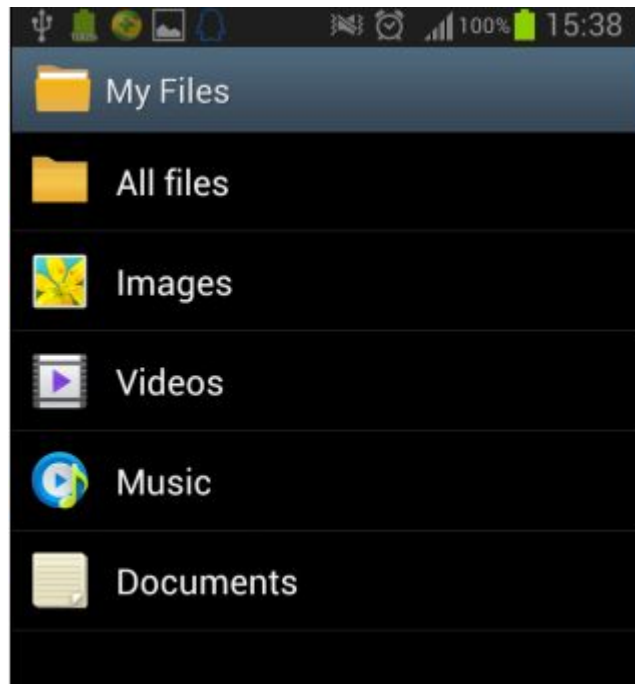


Figure-04

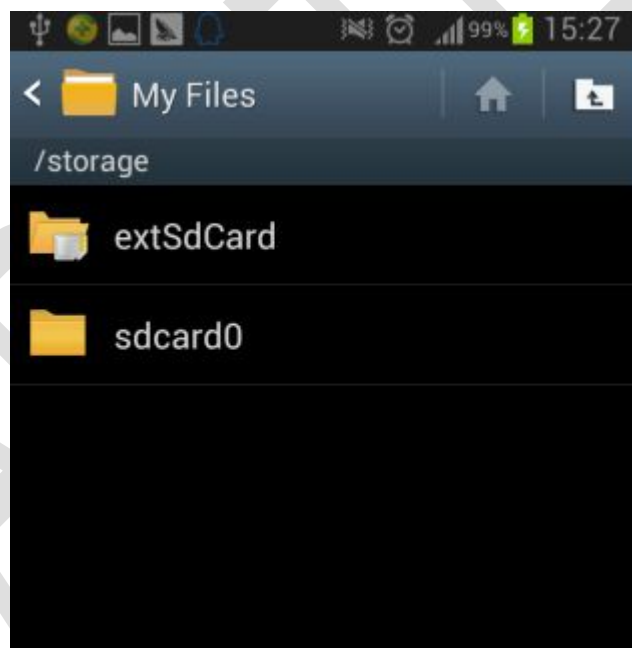


Figure-05

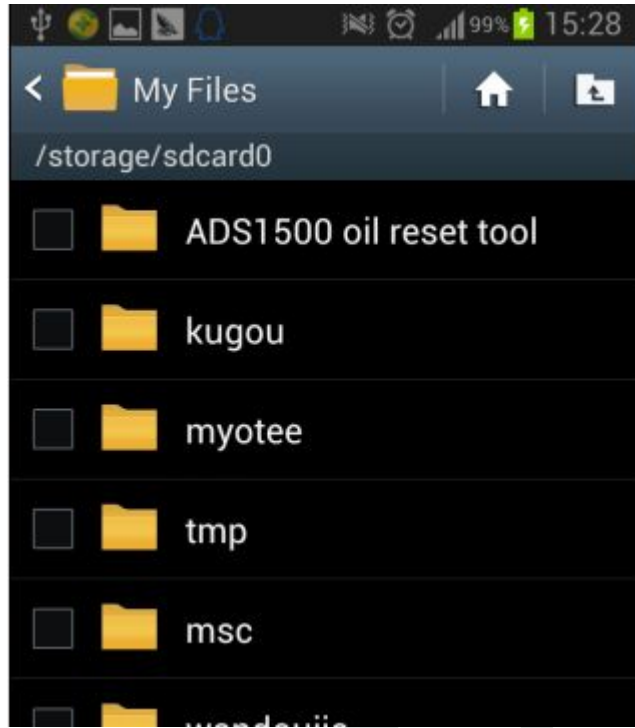


Figure-06

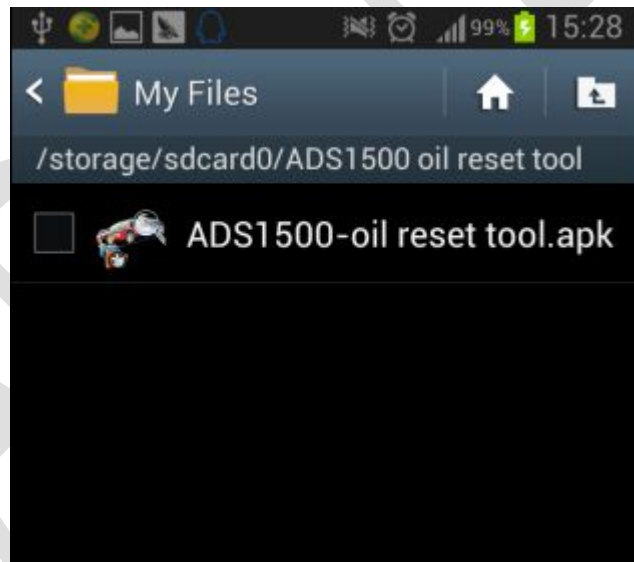


Figure-07

Steps 3: click and it will display the interface as Figure-8, click the “Install” button and start to install (Figure-9).

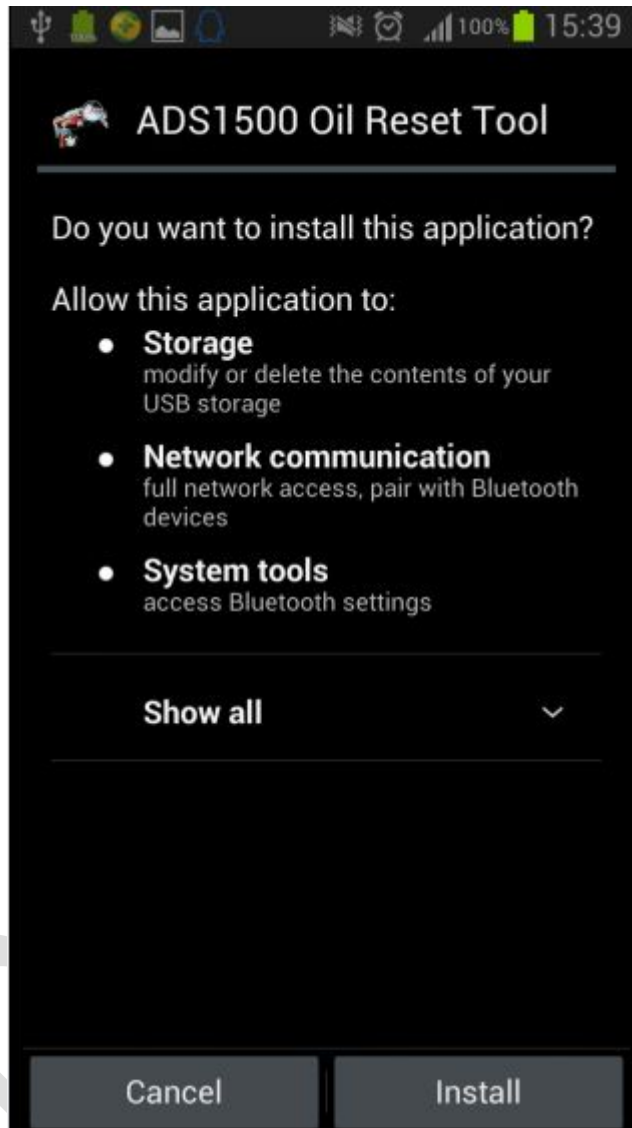


Figure-08

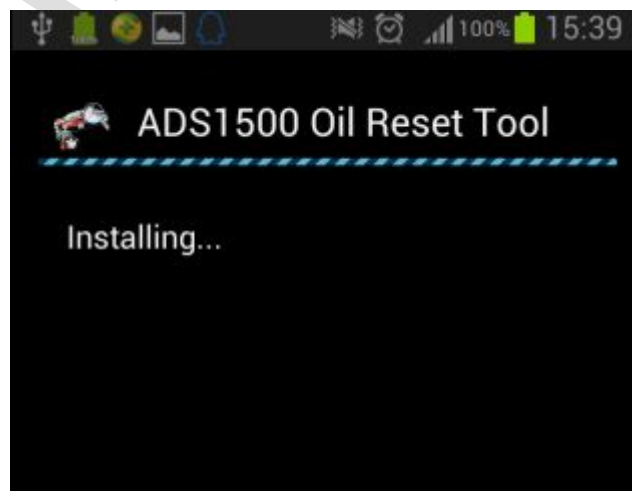


Figure-9

Steps 4: After complete installation, it will display "Application installed" :

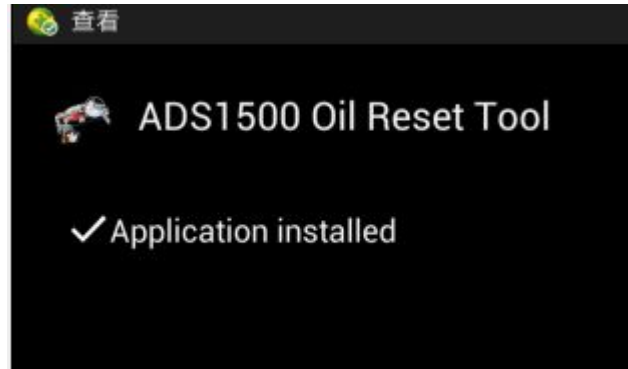


Figure-10

Steps 5: Then the "ADS1500 Oil reset tool" software icon will display on the application program interface (Figure-11).



Figure-11

II. Software Registration

Steps 1: Connect the Diagnostic Device to external power supply and ensure that the Bluetooth Diagnostic Device power indicator lights.



Figure-12

Steps 2: Open mobile phone, enter Settings:



Figure-13

Steps 3: Open the Bluetooth and scan for the device:



Figure-14



Figure-15

Steps 4: You will find ADS device and click it to pair with ADS device, the Passwords is 1234 or may be 0000.

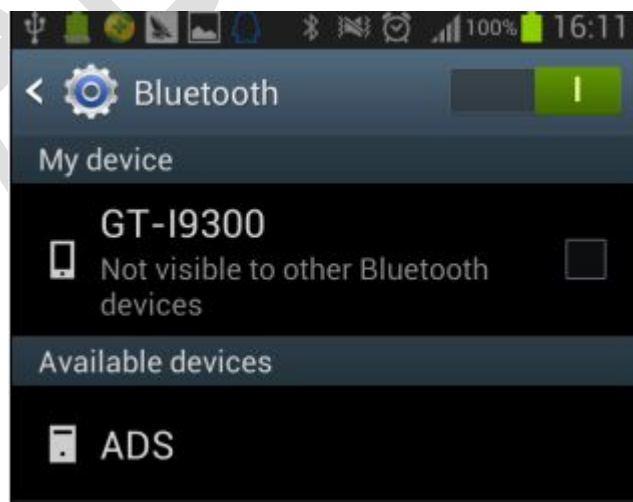


Figure-16

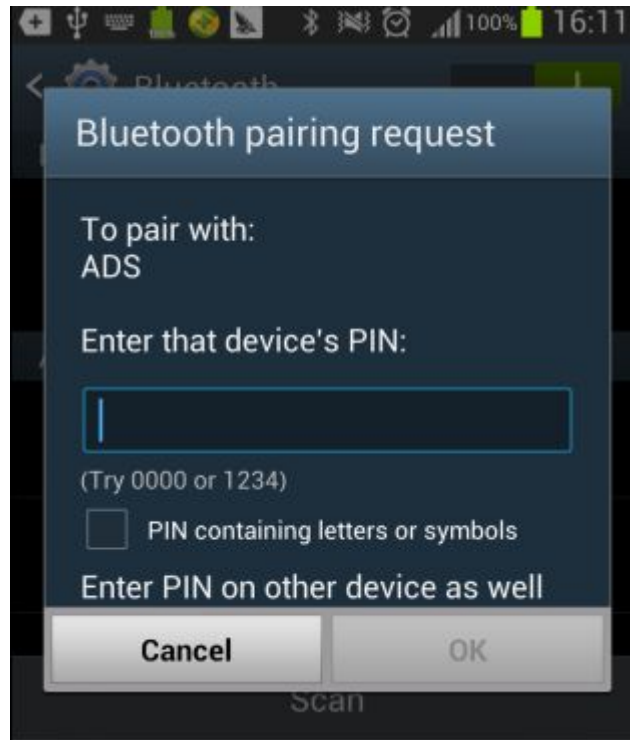


Figure-17

Steps 5: ADS device has been paired, then you can test directly.

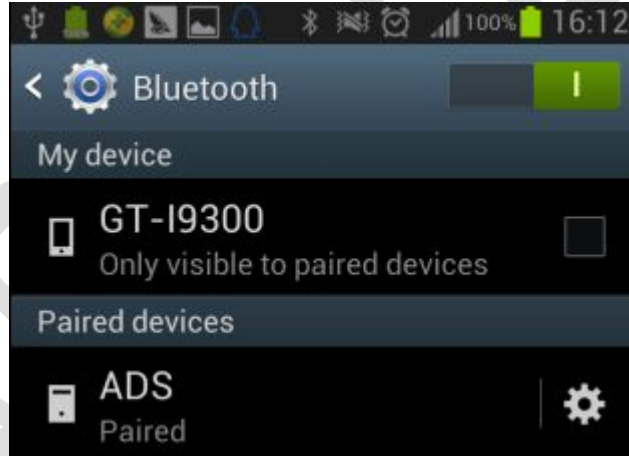


Figure-18

III. Testing instructions

Steps 1: Open your phone's software main interface and enter "ADS1500 Oil Reset Tool" software .



Figure-19

Steps 2: It will display interface of four titles as:

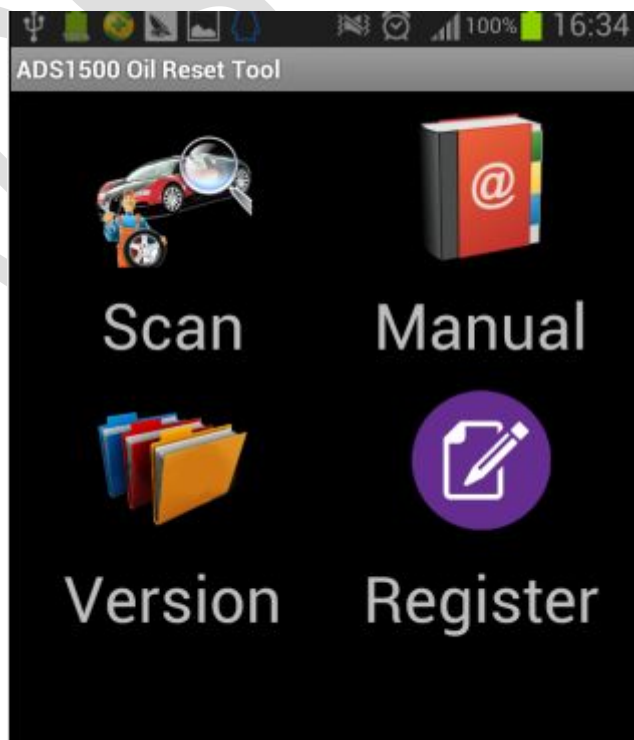


Figure-20

[Scan]: Car diagnostic testing into menu.

[Manual]: Equipment software installation and operation instructions.

[Version]: Wireless Bluetooth diagnostic instrument hardware and mobile phone testing software version information.

[Register]: Match wireless Bluetooth registration before test.

Steps 3: Choose SCAN and start to test as Figure :

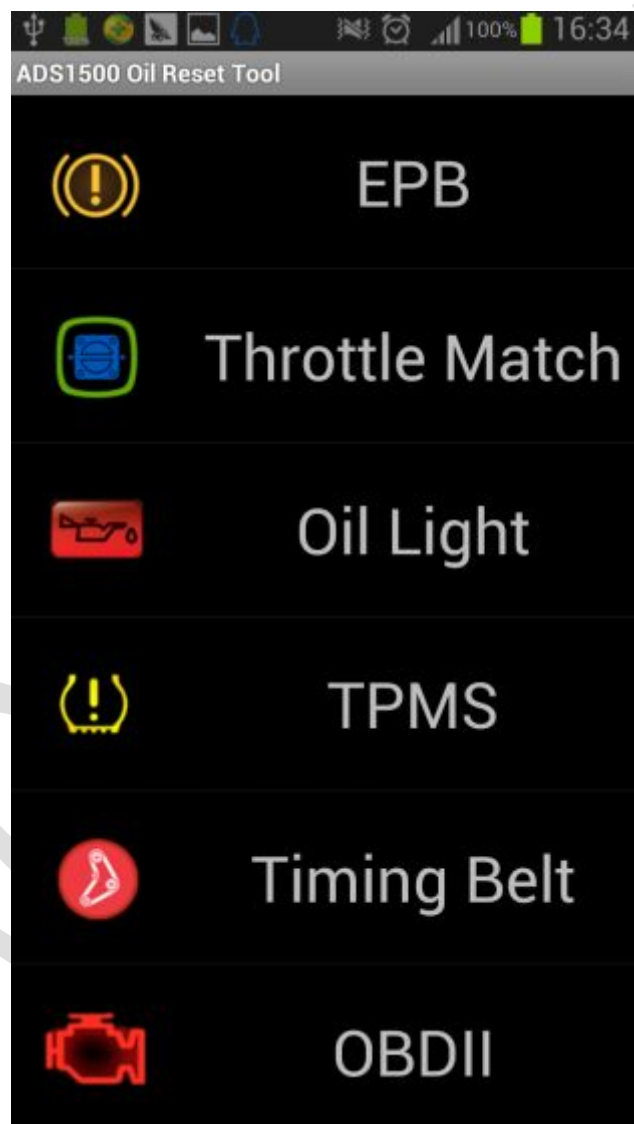


Figure-21

[EPB]: Brake pad changing of EPB electronic brake, such as V.W and Audi

[Throttle Match]: Throttle matching (GM,Honda,Nissan,Acura)

[Oil Light]: Oil Reset/Engine oil light reset

[TPMS]: Tire pressure warning light reset (manual operation)

[Timing Belt]: Timing belt light reset (manual operation)

[OBD-II]: OBD-II engine diagnosis

iv. After service

1. Guarantee period: One year warranty.
2. URL: <http://english.adsscan.com>
3. Phone: +86-755-89368397
4. E-mail: sales@adsscan.com

ADS TECH